

# Contory: a Smart Phone Middleware Supporting Multiple Context Provisioning Strategies

Oriana Riva  
Helsinki Institute for Information Technology  
Cristiano di Flora  
Nokia Research Center, Tampere

2nd International Workshop on Services and Infrastructure  
for the Ubiquitous and Mobile Internet (SIUMI '06)  
July 3rd, 2006



DYNAMOS Project (<http://virtual.vtt.fi/virtual/proj2/dynamos/>)

## Ubiquity of Smart Phones

- We are 6.5 billion people
- First quarter of 2006 total mobile phone shipments reached 226.7 million units
- In 2006, **800 million** mobile phones will be sold
  - one person in eight on the planet
- 4 times PC or TV sale units



## Advances in Smart Phones

- Greater on-board intelligence (software and hardware)
- Larger on-device data storage
- Better connectivity to networks and other devices
- Larger, clearer, colourful screens
- Easier programming of the on-board intelligence
- While retaining their original attributes
  - Pocketable, reliable, inexpensive, simple
  - Mobile voice communications

## Smart Phones in the Pervasive World

- "Anywhere, anytime connected"
- Many usages
  - Information service end point
  - Remoter controller
  - Hub to the Internet
  - ...
- One common requirement: **context-awareness**
  - Shift in focus: "user-centric model"
  - Device's execution context

## Context Provisioning on Smart Phones

- It is a challenging task:
  - Energy-consuming function for energy-constrained mobile devices
  - Integration of sensors in devices should not compromise the portability, usability, lifetime of everyday devices
  - Device cost should be contained
  - Some sensors are operative only in some specific environments (e.g., GPS)

How to effectively support context provisioning on smart phones?


## Outline

- Motivations
- Context provisioning strategies
- Context Middleware
- Evaluation
- Current Status and Future Works

## Internal Context Provisioning


Context providers:

- software components in charge of providing (i.e., sensing and processing) context information
- directly integrated into applications or organized in toolkits (Context Toolkit [2]), frameworks (TEA framework [6]), middleware (RCSM [7])

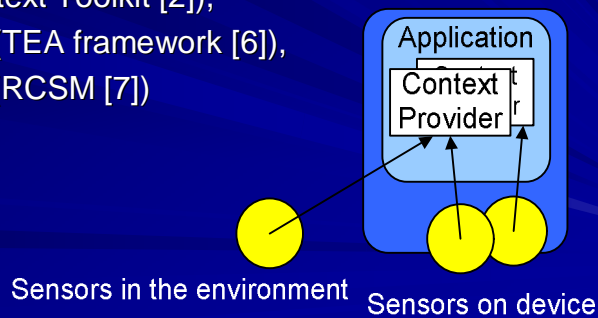


## External context provisioning: infrastructure-based

- Shared context servers (TCoS [4])
- Service infrastructures (Confab [5], JCAF [1])

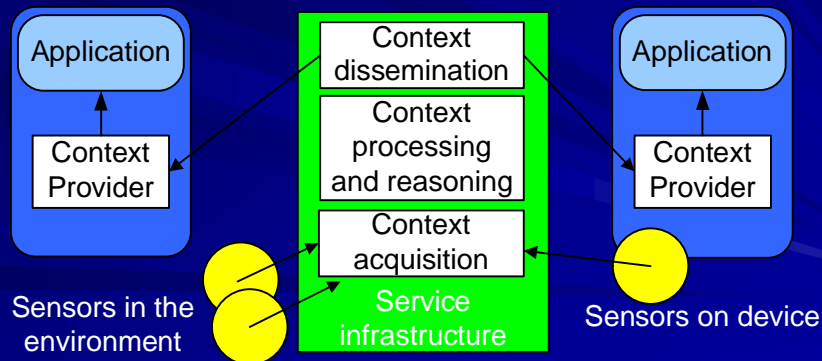

## External Distributed Context Provisioning: Infrastructure-less

- Abstraction of a distributed database
- Data are provided by context providers located on the nodes of a MANET

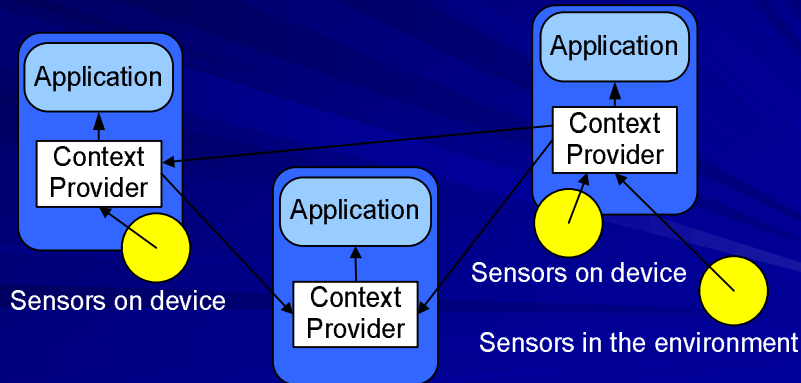

## Outline

- Motivations
- Context provisioning strategies
- Context Middleware
- Evaluation
- Current Status and Future Works

## Context Design Principles

- Transparency
  - Flexible and reliable context provisioning
  - Common querying interface
  - Push and pull access mode
  - Modularity and extensibility
- Key ideas:
- Incorporation of multiple context provisioning strategies
  - Exploit ubiquitous connectivity
  - SQL-like querying interface

## Context Item

Type	Value	Time hhmmss.sss	Lifetime	Source*	Metadata*
location	latitude = 2425.6170 longitude = 6007.5084	092204.999	100000ms	GPS nokiaE234	Validity: A status Precision: HDOP 24.4

\* = optional field

## Context Query Model

```


SELECT <context type>
FROM <source>
WHERE <predicate clause>
FRESHNESS <time>
DURATION <duration>
EVERY <time>
EVENT <predicate clause>
    
```

Example:

```

SELECT temperature
FROM adHocNetwork(first3,3)
WHERE accuracy = 0.2
FRESHNESS 30sec
DURATION 1hour
EVENT AVG(temperature)>25
    
```

## Contory Software Architecture

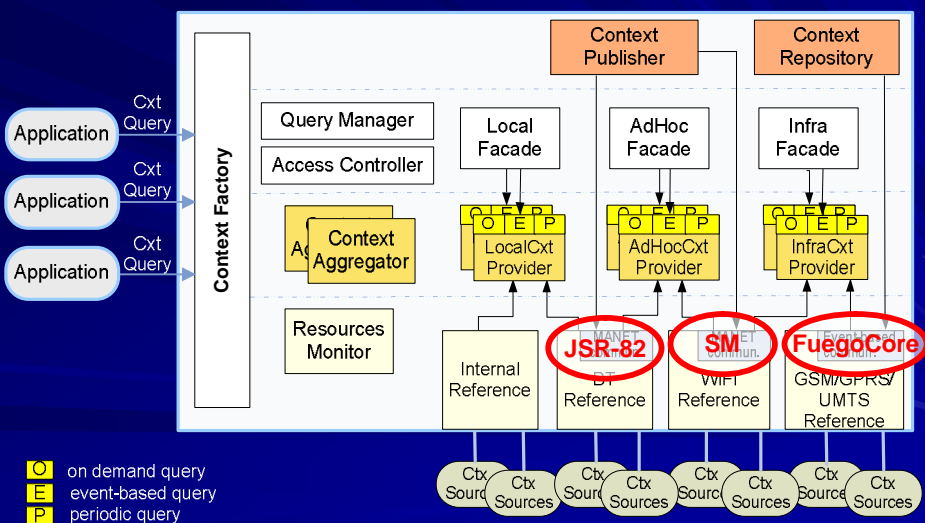

## Implementation

- Implemented in Java
  - Java 2 Micro-Edition (J2ME) with CLDC 1.1 and MIDP 2.0
  - J2ME with CDC
- Development using Nokia Series 60 phones and communicators Nokia 9500
- Event-based platform: **Fuego middleware** (developed at HIIT)
- Ad Hoc Network Programming Support: **Smart Messages** computing platform (developed at Rutgers University)

## Smart Messages at a Glance

- User-defined distributed applications similar to mobile agents
- Composed of code, data, and execution state
- Execute on nodes of interest named by properties (tags)
- Migrate between nodes of interest
  - Self-route at every node in the path during migrations
  - Use geographical routing and content-based routing
- Two Smart Messages implementations:
  - modified KVM, runs on iPAQs
  - Java VM, J2ME CDC, runs on smart phones



## Outline

- Motivations
- Context provisioning strategies
- Contextory Middleware
- Evaluation
- Current Status and Future Works

## Ongoing Evaluation

- Middleware Performance
  - Latency and memory experiments
  - Energy consumption
- Application prototypes
  - DYNAMOS Sailing application
  - Traffic information application
- Some preliminary results...

## Outline

- Motivations
- Context provisioning strategies
- Contory Middleware
- Evaluation
- Current Status and Future Works

## Current Status and Future Works

- Prototype running on Nokia Series 60 and Communicators Nokia 9500
- Ongoing implementation
  - Multi-hop ad hoc context providers
  - Long-running queries processing
- Ongoing evaluation
  - More accurate energy consumption measurements
  - Applications development using Contory

## References

- [1] J. E. Bardram. The Java Context Awareness Framework (JCAF) - A Service Infrastructure and Programming Framework for Context-Aware Applications. In *Proceedings of the 3rd International Conference on Pervasive Computing (Pervasive 2005)*, 2005.
- [2] A. K. Dey, D. Salber, and G. Abowd. A Conceptual Framework and a Toolkit for Supporting the Rapid Prototyping of Context-Aware Applications. *Human-Computer Interaction*, 16(2-4):97–166, 2001.
- [3] H.W. Gellersen, A. Schmidt, and M. Beigl, *Multi-sensor context-awareness in mobile devices and smart artefacts*, Mobile Networks and Applications (2002), 341–351.
- [4] F. Hohl, L. Mehrmann, and A. Hamdan. A context system for a mobile service platform. In *ARCS '02: Proceedings of the International Conference on Architecture of Computing Systems*, pages 21–33, London, UK, 2002. Springer-Verlag.
- [5] J. Hong and J. Landay. An Architecture for Privacy-Sensitive Ubiquitous Computing. In *Proceedings of The Second International Conference on Mobile Systems, Applications, and Services (Mobisys'04)*, pages 177–189, Boston, MA, 2004.
- [6] A. Schmidt, K. A. Adoo, A. Takaluoma, U. Tuomela, K. V. Laerhoven, and W. V. de Velde. Advanced Interaction in Context. In *Proceedings of the First Symposium on Handheld and Ubiquitous Computing (HUC'99)*, pages 89–101, Karlsruhe, Germany, September 1999.
- [7] S. Yau and F. Karim. A context-sensitive middleware for dynamic integration of mobile devices with network infrastructures. *Journal Parallel Distributed Computing*, 64(2):301–317, February 2004.

# Thank you!

[oriana.riva@hiit.fi](mailto:oriana.riva@hiit.fi)